

# Mono 182

182M55041-HN

## Half Cut Cell Solar Module

### Quality Guarantee

5-Year Warranty for Materials and Processing

25-Year Warranty for Extra Linear Power Output



### Multiple Main Grid Design

Better light utilization and current collection capability, effectively improve product power output and reliability.

### Adaptability To Harsh Environments

Third party certification through high salt spray and high ammonia corrosion test.

### Comprehensive Certificates

IEC61215, IEC61701, IEC61730

ISO9001:2015 Quality management systems

ISO45001:Environmental management systems

ISO45001:2018 Occupational health and safety management systems

### Anti PID Guarantee

The attenuation rate caused by PID phenomenon is minimized by battery production technology optimization and material control.

### Capacity Of Load

The whole assembly passes 2400Pa wind load and 5400Pa snow load.



# 182M55041-HN

## Specifications

Solar Cell (Type/Sizes)	Mono(182mm)
Solar Cells Number	144Pcs (6*12*2)
Dimensions	2279*1134*35mm
Weight	28.6KG/Pcs
Structure	3.2 Glass+EVA Film+Back
Frame	Anodized aluminum alloy
Junction Box	IP68/3*Bypass Diode
Cable Cross Section Size	4.0mm <sup>2</sup> /300mm
Mechanical Load	Front 5400Pa/Back 2400Pa
Packing Number	31Pcs/Pallet
Carton Size	2295*1110*1245mm
40'HQ Container	//





## Electrical Parameters at STC

Module Type	QN525	QN530	QN535	QN540	QN545	QN550
Rate Maximum Power (Pmax)	525W	530W	535W	540W	545W	550W
Module Efficiency	20.30%	20.50%	20.70%	20.90%	21.10%	21.30%
Voltage at Pmax (Vmp)	41.10V	41.27V	41.45V	41.62V	41.80V	41.97V
Current at Pmax (Imp)	12.78A	12.85A	12.91A	12.98A	13.05A	13.11A
Open Circuit Volatge (Voc)	48.95V	49.15V	49.35V	49.55V	49.75V	49.95V
Short Circuit Current (Isc)	13.67A	13.74A	13.82A	13.89A	13.97A	14.05A
Power Tolerance	0~+5W					
Temperature Coefficent of Isc		+0.046%°C				
Temperature Coefficent of Voc		-0.276%°C				
Temperature Coefficent of Pmax		-0.350%°C				
STC	Irradiance 1000W/m <sup>2</sup> Cell Temperature 25°C AM1.5					


## Operating Conditions

Operating Temperature	-40~+85°C
Maximum System Voltage	1500VDC
NOCT	45±2°C
Fireproof Performance	Glass C
Maximum Series Fuse	25A
Temperature Coefficient of Voc	-0.276%/K
Temperature Coefficient of Isc	+0.046%/K

## Characteristics

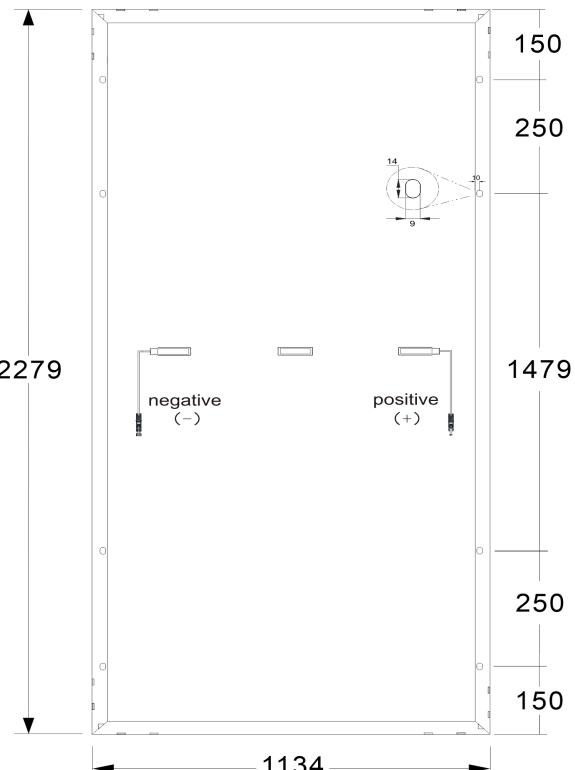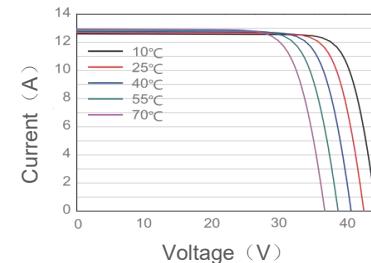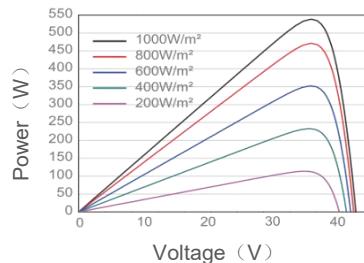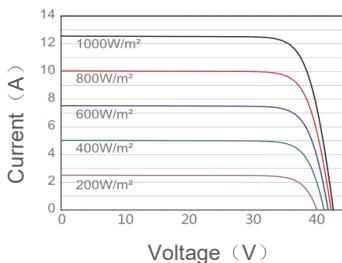

Mechanical Diagrams



Units: mm/±2